Dino-Lite Europe - Phone: - Email:

AM8917MZTL EDGE PLUS

Brand: Dino-Lite


Product Code: AM8917MZTL Edge Plus

Short Description

High Optical Resolution 8.0 Megapixel Enhanced Flexible LED Control (eFLC) Automatic Magnification Reading (AMR) Long Working Distance Automatic Magnification Reading (AMR)

Description

Capture stunning images with the AM8517MZTL 8-megapixel long working distance digital microscope. Engineered with a comprehensive set of features, including AMR, this model is designed to excel in both imaging and measurement-oriented tasks.

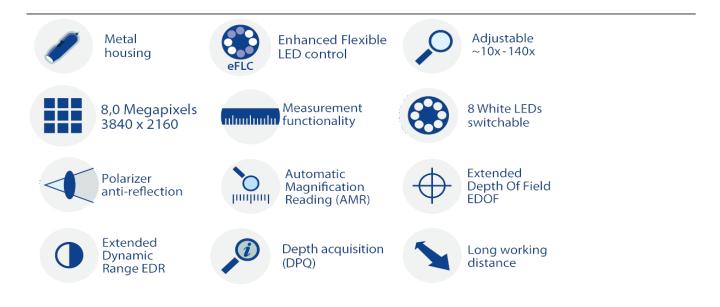

The main features of the AM8517MZTL are:

- 8 Megapixels
- High Optical Resolution
- Automatic Magnification Reading (AMR)
- Extended Depth of Field (EDOF)
- Extended Dynamic Range (EDR)

- Depth Acquisition (DPQ)
- Enhanced Flexible LED Control (eFLC)
- Long Working Distance (LWD) Optics
- Adjustable Polarizer
- Robust Metal Housing
- 10x ~ 140x magnification
- And more...

Working distance/field of view/depth of field

| MAGNIFICAT | IWORKING | FIELD OF | FIELD OF | DEPTH OF |
|-----------------|--------------------|-----------------|----------|-----------------|
| ON RATE | DISTANCE * | VIEW(X) | VIEW(Y) | FIELD |
| 10 | 237.5 | 60.69 | 34.14 | 25.82 |
| 20 | 115.3 | 30.35 | 17.07 | 6.89 |
| 30 | 75.9 | 20.23 | 11.38 | 3.50 |
| 40 | 57.3 | 15.17 | 8.53 | 2.23 |
| 50 | 47.0 | 12.14 | 6.83 | 1.59 |
| 60 | 40.8 | 10.11 | 5.69 | 1.22 |
| 70 | 36.9 | 8.67 | 4.88 | 0.98 |
| 80 | 34.6 | 7.59 | 4.27 | 0.82 |
| 90 | 33.2 | 6.74 | 3.79 | 0.70 |
| 100 | 32.6 | 6.07 | 3.41 | 0.61 |
| 110 | 32.4 | 5.52 | 3.10 | 0.53 |
| 120 | 32.7 | 5.06 | 2.85 | 0.48 |
| 130 | 33.2 | 4.67 | 2.63 | 0.43 |
| 140 | 33.9 | 4.34 | 2.44 | 0.39 |
| Listed volues m | or diffor cliabtly | * Without fromt | | Ilnit - mm |

Listed values may differ slightly * Without front

cap

Unit = mm

Specification

| Lighting | | | | |
|--------------------|---|--|--|--|
| Light/ LED type | White | | | |
| Number of LEDs | 8 | | | |
| Optics | | | | |
| Magnification | $10x \sim 140x$ | | | |
| Working distance | 237.5 ~ 33.9 mm | | | |
| Sensor | | | | |
| Sensor type | CMOS | | | |
| Resolution | 8 Megapixel (3840 x 2160) | | | |
| Maximum frame rate | 10 fps at 8.0 MP, MJPEG 25 fps at 2.0 MP, | | | |
| | MJPEG | | | |
| Compatibility | | | | |

| Interface | USB 2.0 | | | |
|-------------------------|---|--|--|--|
| Operating system | Windows 10/11 | | | |
| Supported image formats | BMP, GIF, PNG, MNG, TIF, TGA, PCX, WBMP, | | | |
| (Windows) | JP2, JPC, JPG, PGX, RAS, PNM | | | |
| Supported video formats | WMV, FLV, SWF | | | |
| (Windows) | | | | |
| Housing | | | | |
| Housing material | Metal housing | | | |
| Dimensions | 130 mm (H) x 33 mm (D) | | | |
| Weight | 120 g | | | |
| Features | | | | |
| Measurement | Yes | | | |
| Calibration | Yes | | | |
| Microtouch sensor | Yes | | | |
| Information | | | | |
| Package contents | N3C-C (Close Cap) N3C-D (Diffuser Cap) N3C- | | | |
| | D2 (Opal Diffuser Cap) N3C-E (Extended Open | | | |
| | Cap) N3C-L (Long Cap) N3C-O (Open Cap) N3C- | | | |
| | S (Sidelight Cap) | | | |
| Warranty information | 2 years European warranty | | | |
| Regulatory approval: | CE, FCC, ROHS | | | |
| Price range | €1500,00 - €1700,00 | | | |

Price range Product Gallery