Dino-Lite Europe - Phone: - Email:

AM4013MZT

Brand: Dino-Lite

Product Code: AM4013MZT




Short Description

1.3 Megapixel resolution Robust metal housing 10-70x & 200x Magnification Polarizer (anti-reflection)

Description

The Dino-Lite AM4013TMZT is a convenient, easy to use, professional handheld digital microscope providing superior image quality with up to 200x optical magnification.

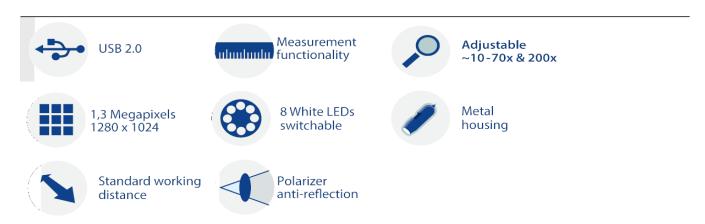

It is equipped with a high quality 1.3 Megapixels sensor with a crystal clear image quality and natural color reproduction, enabling you to view and capture objects with the greatest level of detail. This model comes with the DinoCapture 2.0 software for Windows and DinoXcope software for MacOS, allowing you to do calibrated measurements on pictures

taken with the Dino-Lite. The aluminum housing offers enhanced protection and durability and has the best look and feel. The built-in adjustable polarizer reduces glare and reflection on shiny objects.

Working distance/field of view/depth of field

MAGNIFICATI ON RATE	WORKING DISTANCE	FIELD OF VIEW(X)	FIELD OF VIEW(Y)	DEPTH OF FIELD
Listed values				Unit = mm
may differ				
slightly				
20	48.7	19.6	15.6	3.6
30	21.7	13.0	10.4	1.9
40	9.0	9.8	7.8	-
50	1.9	7.8	6.3	0.88
60	-2.3	6.5	5.2	-
220	-0.1	1.8	1.4	0.20
230	1.0	1.7	1.4	-
240	2.1	1.6	1.3	-

Specification

Lighting	
Light/ LED type	White
Number of LEDs	8
LED on/off switchable:	Yes
Infrared filter	IR cut-filter >650 nm
Diffuser available	No
Emission filter	No
Polarizer	Yes, linear
Optics	
Magnification	10-70x, 200x
Macro zoom	No
Working distance	Standard
Lens type	Glass with anti-reflection coating
Sensor	
Sensor type	CMOS
Resolution	1.3 Megapixel (1280x1024)
Maximum frame rate	30 fps

Compatibility	
Interface	USB 2.0
Operating system	Windows 7,8,10 & 11, MacOS 10.9 and up
Included software	DinoCapture 2.0 (Windows), DinoXcope (Mac OS)
Supported image formats (Windows)	BMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA, PCX, MNG, WBMP, JP2, JPC, PGX
Supported video formats (Windows)	WMV, FLV, SWF
Supported image formats (MacOS)	JPEG, PNG
Supported video formats (MacOS)	MOV
Imaging standards	DirectShow, UVC
Wifi	Wireless-ready, requires the WF-10 WiFi streamer (optional)
Housing	
Housing material	Metal housing
	\mathcal{C}
Magnification lock	No
Magnification lock	No
Magnification lock Dimensions	No 10.5cm (L) x 3.2cm (D)
Magnification lock Dimensions Weight	No 10.5cm (L) x 3.2cm (D) 140g
Magnification lock Dimensions Weight Cable length	No 10.5cm (L) x 3.2cm (D) 140g
Magnification lock Dimensions Weight Cable length Features	No 10.5cm (L) x 3.2cm (D) 140g 1.8m
Magnification lock Dimensions Weight Cable length Features Special feature	No 10.5cm (L) x 3.2cm (D) 140g 1.8m
Magnification lock Dimensions Weight Cable length Features Special feature Measurement	No 10.5cm (L) x 3.2cm (D) 140g 1.8m No Yes
Magnification lock Dimensions Weight Cable length Features Special feature Measurement Calibration	No 10.5cm (L) x 3.2cm (D) 140g 1.8m No Yes Yes
Magnification lock Dimensions Weight Cable length Features Special feature Measurement Calibration Microtouch sensor	No 10.5cm (L) x 3.2cm (D) 140g 1.8m No Yes Yes Yes
Magnification lock Dimensions Weight Cable length Features Special feature Measurement Calibration Microtouch sensor ESD safe	No 10.5cm (L) x 3.2cm (D) 140g 1.8m No Yes Yes Yes
Magnification lock Dimensions Weight Cable length Features Special feature Measurement Calibration Microtouch sensor ESD safe Information	No 10.5cm (L) x 3.2cm (D) 140g 1.8m No Yes Yes Yes Yes Yes Yes Yes
Magnification lock Dimensions Weight Cable length Features Special feature Measurement Calibration Microtouch sensor ESD safe Information Package contents	No 10.5cm (L) x 3.2cm (D) 140g 1.8m No Yes Yes Yes Yes Yes Yes Yes Yes Yes
Magnification lock Dimensions Weight Cable length Features Special feature Measurement Calibration Microtouch sensor ESD safe Information Package contents Warranty information	No 10.5cm (L) x 3.2cm (D) 140g 1.8m No Yes Yes Yes Yes Yes Yes Yes Yes Light Carry pouch, software CD, calibration target, ZT-Z-CC1 Cap closure, user manual 2 years European warranty

Product Gallery