WF4515ZT - Wireless


Brand: Dino-Lite Product Code: WF4515ZT

Short Description

1.3 Megapixel Edge sensor20-220x magnificationAdjustable polarizerFlexible LED Control (FLC)Automatic Magnification Reading (AMR)

Description

The Dino-Lite WF4515ZT is a Wireless model that is part of the Universal series. Go from wireless to wired and back in an instant. Work wired via USB or work wireless with the attachable WF-20 Wireless adapter.

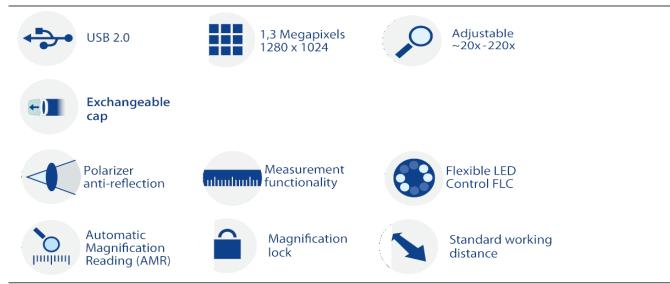

The WF4515ZT is equipped with premium features such as Flexible LED Control (FLC), integrated polarizer, extensive measurement functionality and Automatic Magnification Reading (AMR) for measurement-intensive applications.

The main features of the WF4515ZT are:

- Completely wireless solution (including WF20)
- 20-220x magnification
- 1.3 Megapixel Edge sensor

- Automatic Magnification Reading (AMR)
- Adjustable polarizer
- Flexible LED Control (FLC)
- And more...

Working distan MAGNIFICATI ON RATE Listed values may differ slightly	ce/ field of view/ WORKING DISTANCE * * Without front cap	FIELD OF VIEW(X)	FIELD OF VIEW(Y)	DEPTH OF FIELD Unit = mm
20	60.2	19.5	14.6	2.5
30	33.5	13.0	9.7	1.8
40	20.9	9.8	7.3	1.5
50	13.9	7.8	5.8	-
60	9.7	6.5	4.8	-
70	7.1	5.6	4.2	1.0
80	5.5	4.9	3.6	-
90	4.5	4.3	3.2	-
100	4.1	3.9	2.9	-
110	4.0	3.6	2.7	-
120	4.1	3.3	2.4	-
130	4.5	3.0	2.2	-
140	5.0	2.8	2.1	-
150	5.6	2.6	1.9	-
160	6.3	2.4	1.8	-
170	7.1	2.3	1.7	-
180	8.0	2.2	1.6	-
190	8.9	2.1	1.5	-
200	9.9	2.0	1.5	-
210	10.9	1.9	1.4	-
220	11.9	1.8	1.3	0.1

Specification	
Lighting	
Light/ LED type	White

Number of LEDs	8			
LED on/off switchable:	Yes			
Infrared filter	IR cut-filter >650 nm			
Diffuser available	Yes (N3C-D included)			
Emission filter	No			
Polarizer	Yes, linear			
Optics				
Magnification	20-220x			
Macro zoom	No			
Working distance	Standard			
Lens type	Glass with anti-reflection coating			
Sensor				
Sensor type	CMOS			
Resolution	1.3 Megapixel (1280x1024)			
Maximum frame rate	30 fps			
Compatibility	-			
Interface	USB 2.0			
Operating system	Windows 7, 8, 10 & 11, MacOS 10.11.6 and up			
Included software	DinoCapture 2.0 (Windows), DinoXcope (Mac			
	OS)			
Supported image formats	BMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA,			
(Windows)	PCX, MNG, WBMP, JP2, JPC, PGX			
Supported video formats	WMV, FLV, SWF			
(Windows)				
Supported image formats	JPEG, PNG			
(MacOS)				
Supported video formats	MOV			
(MacOS)				
Imaging standards	DirectShow, UVC			
Wifi	Yes			
Housing				
Housing material	Composite/ plastic housing			
Dimensions	11.4cm (L) x 3.3cm (D)			
Weight	111g			
Cable length	1.8m			
Features				
Special feature	Automatic Magnification Reading (AMR),			
	Flexible LED Control (FLC)			
Measurement	Yes			
Calibration	Yes			
Microtouch sensor	Yes			
ESD safe	No			

Microscope, WF-20, carry pouch, software CD, calibration target, user manual, N3C-O- Open cap, N3C-C- Closed cap, N3C-D- diffuser cap, N3C-E- Extension cap, N3C-L- Long cap, N3C-S- Side light cap
2 years European warranty
CE, FCC, ROHS
€900,00 - €1100,00

Product Gallery